


# FUNMAT PRO 310 NEO

## Industrial High-Speed 3D Printer

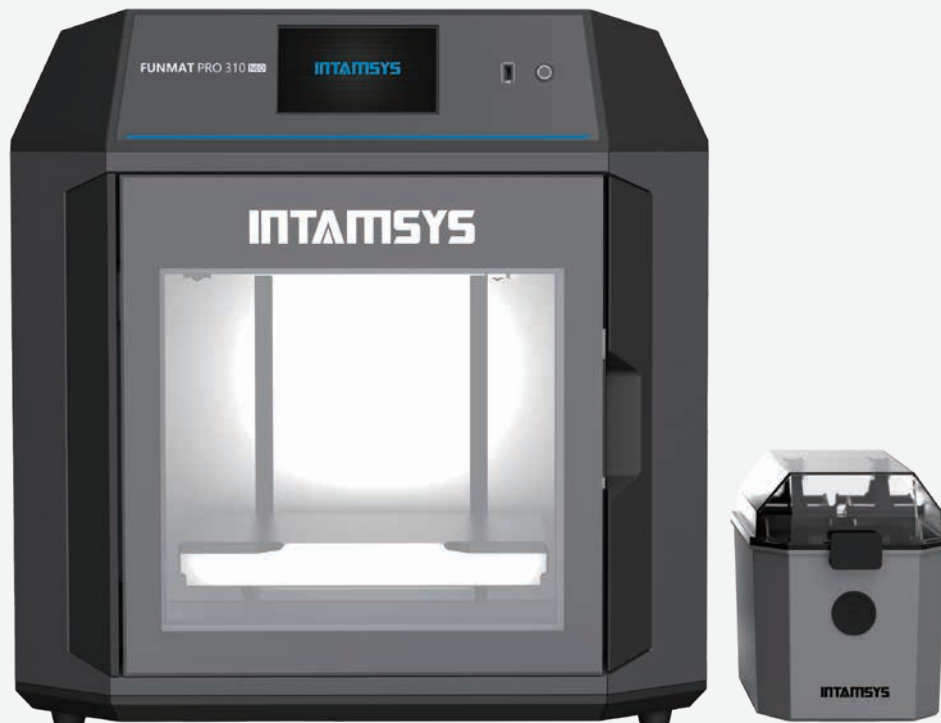

### Industrial Performance

100 °C thermostatic chamber design, full-size printing capacity of engineering plastics.



### High-Speed Printing

With 8 types of material process packages for high-speed printing, the production capacity reaches 500g to 1000g per day.



### High Versatility

Print a wide range of materials such as engineering materials, flexible materials and high performance materials such as PPS.



### Intelligent Auto-Leveling

Enjoy effortless setup and printing with auto mesh leveling and Z-axis calibration. Precise and efficient.

The FUNMAT PRO 310 NEO empowers engineers and designers with industrial-grade performance and reliability, taking user experience to the next level. Its 100°C heated chamber, combined with a spacious 305 x 260 x 260 mm build volume, enables the full-size printing of larger models with no compromise.

New self-developed high-speed architecture ensures the superior surface finish and high dimensional precision, significantly enhances production efficiency.



## Technical Parameters

### Printing

Technology	FFF (Fused Filament Fabrication)	Leveling	Mesh Leveling (Max.100 Points)
Build Volume	Single nozzle: 305 x 260 x 260 mm; Dual nozzle: 260 x 260 x 260 mm	Filament Diameter	1.75 mm
Layer Thickness	0.1 - 0.3 mm	Materials*	PC, ABS-HS, PPA-CF/GF, PA, PPS and various fiber materials, support materials
Number of nozzles	2 (IDEX)	Functions	Filament Runout Warning, Remote Control, Remote Printing, Online Update
Nozzle Temperature	Max. 350 °C		
Printing Speed	Max. 500 mm/s		
Printing Acceleration	Max. 10000 mm/s <sup>2</sup>		
Chamber Temperature	Max. 100 °C		
Platform Temperature	Max. 160 °C		

### Machine

Voltage	200 – 240 V/7 A. 50/60 Hz	Filament Box	Overall sealed box, Built-in Reusable Molecular Sieve To Keep Dry, Temp. and Humidity Real-time Monitoring, Standalone
Max. Power	1500 W		
Connectivity	WiFi, Ethernet, USB		
Screen	7-inch Touch Screen		
Build Plate	Magnetic Flexible Buildplate	Number of Spools	2 (Max. 1 Kg/pcs)
Build Chamber	Fully Enclosed Printing Chamber	Resolution	XY: 16 µm; Z: 1.25 µm
Cooling	Fan	Filtering System	HEPA + Activated Carbon, Replaceable
Nozzle Maintenance	Quick Release Design, Easy Installation And Disassembly	Overall Dimensions	700 x 655 x 700 mm

### Safety

<b>Safety Design</b>	Safety Door Lock, Over Temperature Protection, Overload Protection, Warning Labels
----------------------	--

### Slicing

<b>Slicing Software</b>	INTAMSUITE NEO
<b>Supported File Types</b>	.stl/.obj/.x3d/.3mf/.stp/.iges
<b>Operating System</b>	Windows

### Operating Environment

<b>Working Temperature</b>	0°C ~ 30°C (32°F ~ 86°F)
<b>Working Humidity</b>	20 % ~ 70 %
<b>Storage Temperature</b>	-20°C ~ 55°C (-4°F ~ 131°F)
<b>Storage Humidity</b>	10 % ~ 90 %

\*Printing materials are not limited to this table, recommended printing materials are fully validated on the printer.